


## 1 True or False

- 1.1 On a fast cross-continental link (~100Gbps), **propagation delay** usually dominates **end-to-end packet delay** (Most messages are smaller than 100MB).
- 1.2 On the same cross-continental link (~100Gbps), when transferring a 100GB file, **propagation delay** still dominates end-to-end file delivery.
- 1.3 On-demand circuit-switching is adopted by the Internet.
- 1.4 The aggregate (i.e., sum) of peaks is usually much larger than peak of aggregates in terms of bandwidth usage.
- 1.5 Bursty traffic (i.e., when packet arrivals are not evenly spaced in time) always leads to queuing delays.

## 2 End-to-End Delay

Consider the diagram below. Link 1 has length  $L_1$  m (where m stands for meters) and allows packets to be propagated at speed  $S_1 \frac{m}{sec}$ , while Link 2 has length  $L_2$  m but it only allows packets to be propagated at speed  $S_2 \frac{m}{sec}$  (because the two links are made of different materials). Link 1 has transmission rate  $T_1 \frac{bits}{sec}$  and Link 2 has transmission rate  $T_2 \frac{bits}{sec}$ .

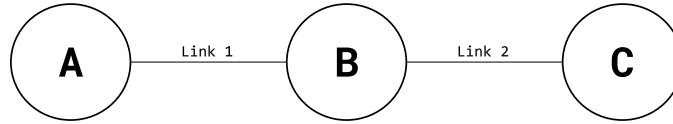

Assuming nodes can send and receive bits at full rate and ignoring processing delay, consider the following scenarios:

- 2.1 How long would it take to send a packet of 500 Bytes from Node *A* to Node *B* given  $T_1 = 10000$ ,  $L_1 = 100000$ , and  $S_1 = 2.5 * 10^8$ ?
- 2.2 Compute RTT (round trip time) for a packet of  $B$  Bytes sent from Node *A* to Node *C* (packet gets transmitted back from Node *C* immediately after Node *C* receives it).
- 2.3 At time 0, Node *A* sends packet  $P_1$  with  $D_1$  Bytes and then it sends another packet  $P_2$  with  $D_2$  Bytes immediately after it pushes all bits of  $P_1$  onto Link 1. When will Node *C* receive the last bit of  $P_2$ ?
- 2.4 Find the variable relations that need to be satisfied in order to have no queuing delays for part (c).

### 3 Statistical Multi-What?

Consider three flows ( $F_1, F_2, F_3$ ) sending packets over a single link. The sending pattern of each flow is described by how many packets it sends within each one-second interval; the table below shows these numbers for the first ten intervals. A perfectly smooth (i.e., non-bursty) flow would send the same number of packets in each interval, but our three flows are very bursty, with highly varying numbers of packets in each interval:

Time (s)	1	2	3	4	5	6	7	8	9	10
$F_1$	1	8	3	15	2	1	1	34	3	4
$F_2$	6	2	5	5	7	40	21	3	34	5
$F_3$	45	34	15	5	7	9	21	5	3	34

- 3.1 What is the peak rate of  $F_1$ ?  $F_2$ ?  $F_3$ ? What is the sum of the peak rates?
- 3.2 Now consider all packets to be in the same aggregate flow. What is the peak rate of this aggregate flow?
- 3.3 Which is higher - the sum of the peaks, or the peak of the aggregate?